


# VoradianEdge™
# Hosted PBX User Guide

## FastFind Links

Using Your Desk Phone

Using the User Web Portal

Voicemail

Answering Rules and Time Frames

Contacts

Phones

Music On Hold

Call History

Profile

# CONTENTS

**Contents** ..... ii

**Introduction** ..... iv

**1. Using Your Desk Phone** ..... 5

Making Calls ..... 6
Making International Calls ..... 6
Extension Dialing ..... 6
Intercom ..... 6
Receiving Calls ..... 7
Voicemail ..... 7
Accessing Voicemail ..... 7
Setting Up Your Mailbox ..... 7
Alternate Greetings ..... 8
Voicemail Tree ..... 8
Handling Calls ..... 10
Attended Transfer ..... 10
Blind Transfer ..... 10
Transfers to External Numbers ..... 11
Voicemail Transfer ..... 11
Park and Hold ..... 11
Directed Call Pickup ..... 11
3-Way Conference ..... 12

**2. Using the User Web Portal** ..... 13

Accessing the Portal ..... 14
Desktop Call Control ..... 14
Incoming Calls ..... 14
Active Calls ..... 15
Home 16
Voicemail ..... 17
Messages ..... 17
Voicemail Settings ..... 18
Recording a Greeting ..... 19
Uploading a Greeting ..... 21
Recorded Name ..... 22
Answering Rules and Time Frames ..... 22

Time Frames....22
If you select Days of the week and times....24
If you select Specific dates or ranges....28
Answering Rules....30
Call Forward Drop-down Options....32
Ring Timeout....33
Allowing or Blocking Callers....33
Contacts....36
Filter and Search....36
Add and Import Contacts....36
Adding a Contact....37
Importing Contacts....38
Selecting Favorites....38
Editing Contacts....38
Phones....39
Using Voradian MobileUC....40
Music On Hold....41
Adding Music on Hold Files....41
Playing an Introductory Greeting....43
Call History....44
Filtering the Call History....45
Exporting the Call History Log....47
Profile....48

**Index....50**

# INTRODUCTION

Welcome to the VORADIAN™ Hosted PBX User Guide. Your Hosted PBX combines the best in traditional phone system features with modern Internet Protocol (IP) capabilities using advanced SIP technology.

Voradian PBX system is fueled by a world-class infrastructure that includes the largest and most powerful privately managed IP network in the United States, Global interconnections with the world's largest carriers and telecom partners; and powered by our next generation VoradianEdge™ platform that delivers Class-5 IP Centrex features and functionalities.

In this guide, you will learn how to perform many common tasks on your phone, as well as make full use of your web portal and Voradian MobileUC app. Refer to this guide often to familiarize and become fluent with the features and functionalities of your new VORADIAN telecommunications system.

# 1. USING YOUR DESK PHONE

**Topics:**


- *Making Calls (page 6)*
- *Receiving Calls (page 7)*
- *Voicemail (page 7)*
- *Handling Calls (page 10)*


While there are many different models of desk phones, they largely all work the same way. In this chapter, you will learn how to use common functions of your phone.

# Making Calls

Making a call with your phone does not require dialing a leading 9 to access and outside line. You can dial on-hook or off-hook.

- **To dial on-hook**

1. Dial the phone number.
2. Pick up the handset, headset, or speaker.

- **To dial off-hook**

1. Pick up the handset, headset, or speaker.
2. Dial the phone number.

Calls to the U.S and Canada are all dialed using 10 or 11 digits. Local calls can be dialed using 7 digits within some locations in the U.S and Canada.

## Making International Calls

- **To dial an international call**

1. Dial the international call code 011.
2. Dial the country code.
3. Dial the local number.

International calling is disallowed by default to prevent toll fraud. Your company's authorized representative must request Voradian to enable International calling plan for your account.

## Extension Dialing

Extensions on your system can be dialed using their 3 or 4 digit extension number or by pressing the pre-configured button on your phone corresponding to the desired extension.

## Intercom

SIP/VoIP phones provide an intercom feature that allows you to instantly connect to other phones within your office. Intercom functionality is ideal for announcing visitors or asking a quick question. When one phone intercoms another extension, it does not ring the other phone. Instead, the other phone will beep, and then its microphone and speaker automatically turns on to enable intercom communication.

- **To intercom, Dial 08 + Ext. For example, to intercom extension 100, Dial 08100.**

# Receiving Calls

When a call comes in, you can answer it via a headset, speakerphone, or handset.

- **To answer a call using a handset**
  - Lift the handset off-hook.
- **To answer a call using a speakerphone**
  - Press the **Speaker** button.
- **To answer a call using a headset**
  - Usage depends on how the headset is connected. Often, you'll press the button on the headset or press the headset button on the phone.

# Voicemail

## Accessing Voicemail From Your Desktop Phone

- **To access your voicemail**

1. Press the **Messages** button on your phone to access your voicemail box or dial **5001** if you can not identify the voicemail button.
2. If you subscribe to multiple mailboxes, a list of mailboxes may appear. Select the mail box you want to access.
3. When prompted, enter your voicemail pin, and then press #.

- **To access another person's mailbox**

1. Dial **5000**.
2. When prompted, enter the other person's extension number.
3. Enter the voicemail PIN of the other person's mailbox, followed by #.

## Setting Up Your Voice Mailbox

The first time you log in to your mailbox, you are prompted to record your name for the directory and record your personal voicemail greeting.

The name recording is for the dial-by-name directory, so when someone enters the first three letters of your last name, it will play back your name recording and provides the option for the caller to connect to your extension.

The personal voicemail greeting plays when your mailbox is reached. It is very important to make a custom message, as many callers will not leave messages at mailboxes that have generic greetings or not yet setup to receive messages.

## Alternate Greetings


Your mailbox supports multiple greetings for different scenarios like business trips and holidays.

- **To record an alternate greeting**

1. From your mailbox, press **6** for greetings, and then press **1** to record an alternate greeting.
2. When prompted for the greeting number press **2** for your next alternate greeting (1 is your default greeting).
3. After your recording is completed, select the active greeting by selecting option **3** in the greetings menu.

## Voicemail Tree

On the next page you'll find a voicemail tree showing what to dial for each option in your mailbox.

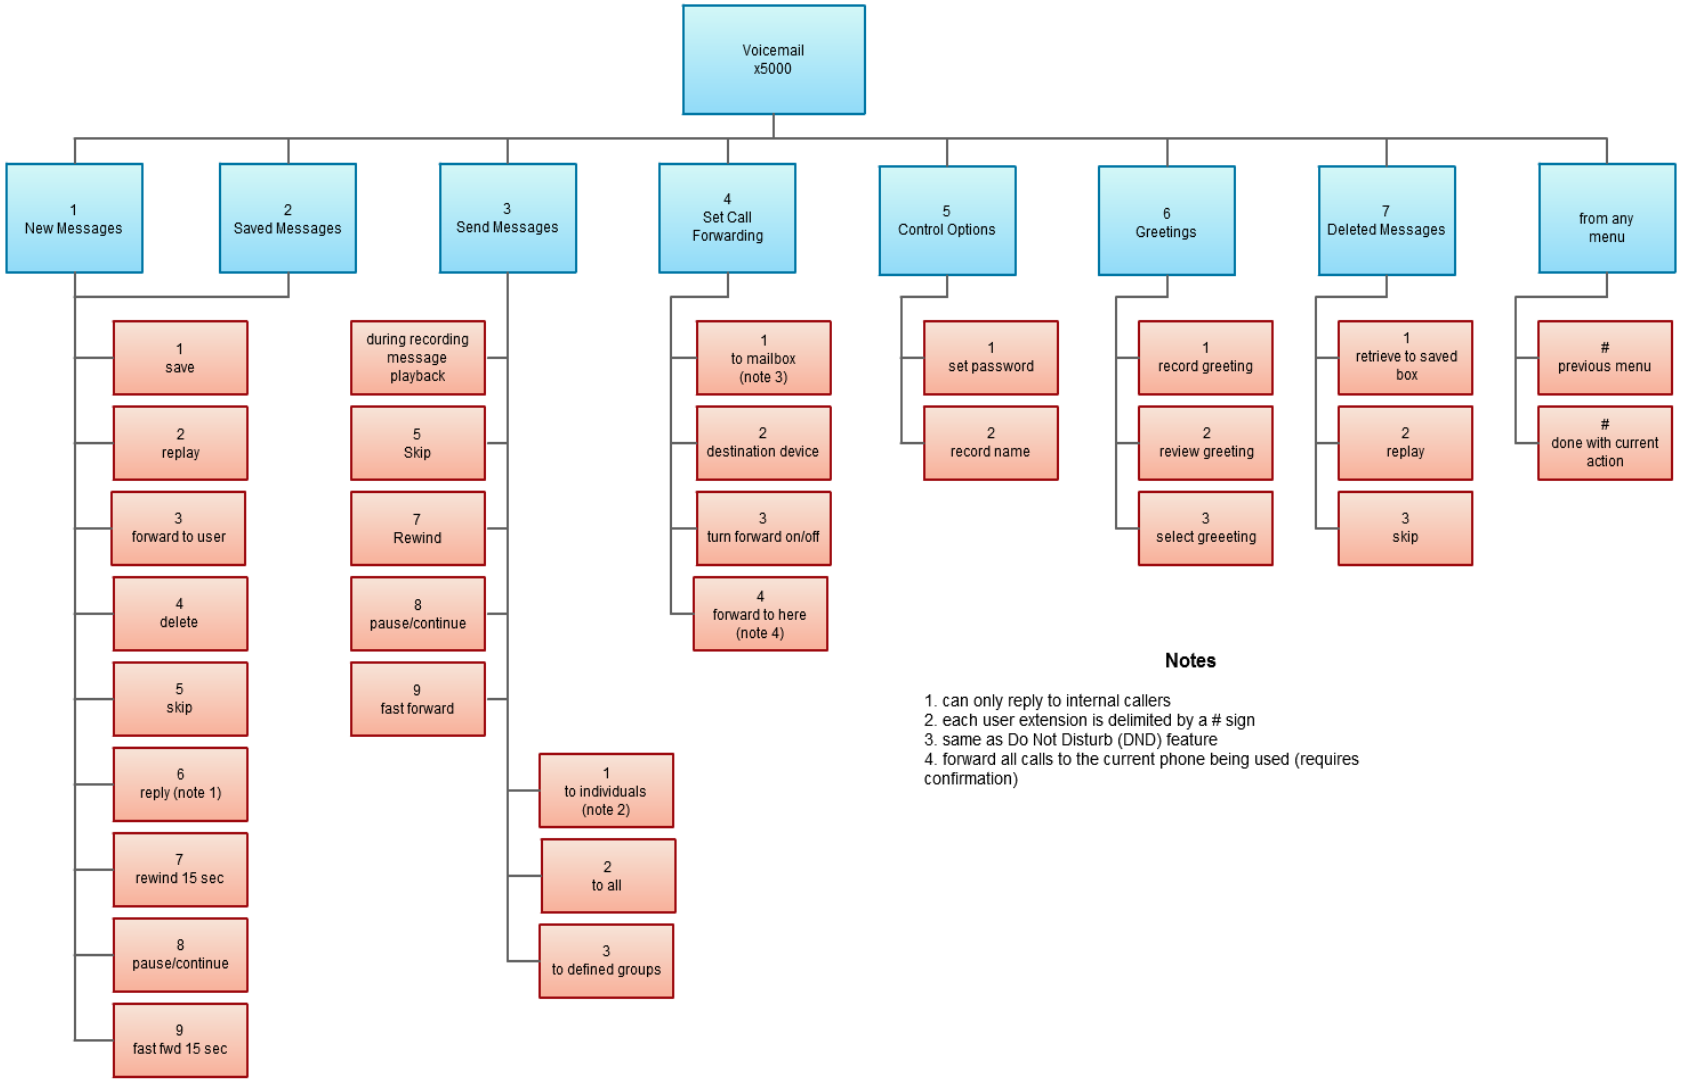


**Notes**

1. can only reply to internal callers
2. each user extension is delimited by a # sign
3. same as Do Not Disturb (DND) feature
4. forward all calls to the current phone being used (requires confirmation)

# Handling Calls

Your Voradian Hosted PBX features various ways to move calls around, including attended transfer, unattended (blind) transfer, voicemail transfer, park, and more. In this section, references to BLFs are the 1-touch buttons to extensions common at front-desk phones.

[Some IP Phones have BLF function keys. BLF is an acronym for "**B**usy **L**amp **F**ield", which is a lighted status indicator on an IP/VoIP Phone that tells you whether another extension connected to the same PBX is busy or not. Depending on the type of phone you have, BLF's will remain green, meaning the extension is free to talk. If the BLF starts to flash red, it normally means someone is calling that extension. If the BLF function key is red, it means the owner of that extension is on a call. Your specific desktop phone may or may not be setup with this feature.]

## Attended Transfer

Attended transfer allows you to speak to the transfer recipient prior to completing the transfer while the caller is on hold.

- **To perform an attended transfer using Polycom and Yealink phones**

1. Press the **Transfer** key/softkey on your phone.
2. Dial the recipient's extension or press their BLF.
3. Speak to the recipient, and then either press **Transfer** again to complete or cancel if the recipient cannot take the call.

## Blind Transfer

Blind transfer allows you to transfer a call straight to the recipient.

- **To blind transfer using Polycom phones with older firmware**

1. Press **Transfer**.
2. Press the **Blind** softkey. (if there is no Blind softkey see directions for new firmware)
3. Enter the extension of the recipient or the recipient's BLF.

- **To blind transfer using Polycom phones with newer firmware**

1. Press and hold the **Transfer button**.
2. Select Blind from the on-screen menu
3. Enter the extension of the recipient or the recipient's BLF.

➢ **To blind transfer using Yealink phones**

1. Press **Transfer**.
2. Dial the extension of the recipient
3. Press Transfer.

➢ **To one-touch transfer using other phones, see the user manual for that phone**

## Transfers to External Numbers

A transfer can also go to an external number such as a cell phone. Follow the transfer directions above but instead of dialing an extension, dial the 10 or 11 digit phone number.

## Voicemail Transfer

Voicemail transfer goes straight to the recipient's voicemail box without ringing the recipient's phone.

➢ **To perform a voicemail transfer**

– Perform a blind transfer with a 03 prefix before the extension. For extension 101's voicemail, for example, blind transfer to 03101.

## Park and Hold

On your phone system, hold is a local function. This means a call held on your phone cannot be picked up at another station. Park is a system-wide function. This means a call parked at one phone may be picked up by any phone within your company, including remote stations.

➢ **To park a call**

1. Dial ******* (star, star, star) in an active call from any phone. The system will say, "The call is parked at 7*xx*." (Make a note of this orbit number).
2. Hang up and announce to the recipient which parking orbit the call is parked.

To retrieve the parked call, dial **7*xx*** where ***xx*** is the parking orbit number stated by the system.

## Directed Call Pickup

Directed call pickup (DCP) allows you to answer a call ringing at another station.

➢ **To perform a directed call pickup**

– Dial 0**7ext**. If 111 is ringing, for example, dial 0**7111** to pick up that call.

Phones with BLFs to the ringing station can also press the corresponding BLF.

## 3-Way Conference

- **To make a 3-way conference**

1. Call or be called by the first participant in the conference.
2. Press the **Conference** key/softkey, and then dial the second participant.
3. After the second participant picks up, press **Conference** again to connect everyone.

**NOTE:** The desktop phone softkey/ one-touch functionalities listed here can also be accomplished using the (*) star key functions in the system. If your desktop phone is not programmed with softkey/ one-touch functionality or if you are using an entry level desktop phone not capable of softkey functionalities, you may use the (*) star key capabilities of the Voradian PBX system to accomplish all the functions and capabilities listed here.

# 2. USING THE USER WEB PORTAL

**Topics:**


- *Accessing the Portal (page 14)*
- *Voicemail (page 17)*
- *Answering Rules and Time Frames (page 22)*
- *Contacts (page 36)*
- *Phones (page 39)*
- *Music On Hold (page 41)*
- *Call History (page 44)*
- *Profile (page 48)*


Each extension of your Voradian Hosted PBX system has access to a powerful web portal and dashboard for managing voicemail, call routing, and much more. You will need your username and password to access the portal. Once logged in, you may change or modify your password. If you do not have username and password information, check with your systems administrator.

# Accessing the Portal

➢ **To access the web portal**

1. Start a web browser. (Chrome browser is recommended but you may use any other browser)
2. Go to *https://portal.voradian.com*.
3. At the login page (see Figure 2-1):
   - Click in the **Login** name field and type your email address *user@customerdomain.com*, where *customerdomain.com* typically is the same as your email address domain.
   - Click in the **Password** field and enter your user password.

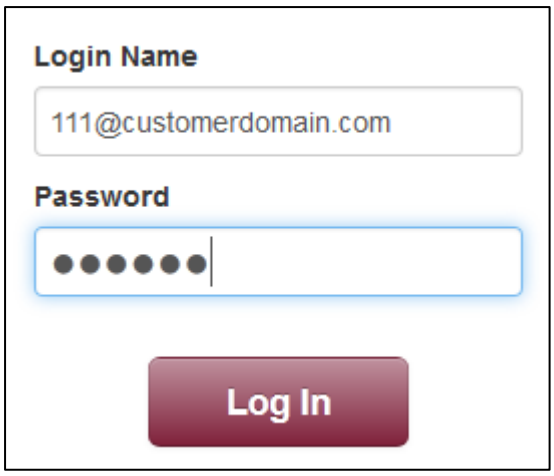



**Figure 2-1. Login Page**

## Desktop Call Control

Desktop call controls appear when making or receiving a call. These controls allow you to see who is calling and manage a current call.

### *Incoming Calls*

Incoming calls appear in a window in the portal similar to the one in Figure 2-2. This window shows the caller ID name and number, along with **Reject** and **Answer** buttons.

- Selecting **Reject** sends the call to voicemail if available. The **Answer** button may not be available, depending upon your handset model.




**Figure 2-2. Example of an Incoming Call**

### *Active Calls*

Figure 2-3 shows an active call window that displays the caller ID and call time. The three controls at the bottom of the window let you hold, hang up, or transfer the call. If you select transfer, a field appears for entering the extension of the recipient. If you prefix the recipient's extension number with 03, the call goes straight to voicemail.

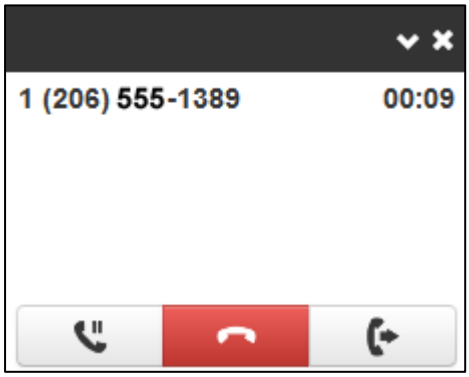



**Figure 2-3. Example of Active Call Window**

## Home



The Home page/ Dashboard of your portal provides an at-a-glance view of everything that's going on with your extension. Table 2-1 describes the areas on the Home page.

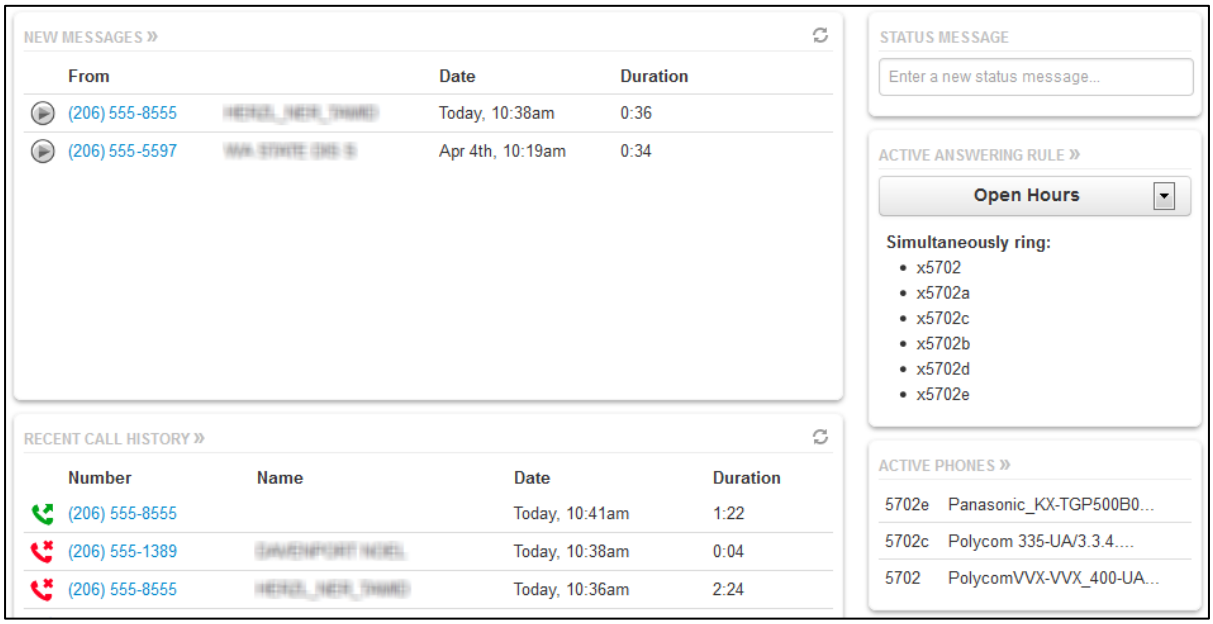



**Figure 2-4. Example of Home Page**

**Table 2-1. Fields in the Home Page**

| Field | Description |
|---|---|
| New Messages | Shows new messages. You can play messages, click to call back, download, save, and delete. To see all the controls, hover over the message. |
| Recent Call History | Color-coded icons show your recent calls.<br>• Green icon = outbound call.<br>• Red icon = missed inbound calls.<br>• Blue icon = inbound received calls.<br>To call back a number, click the phone number. |
| Status Message | Allows you to enter a status message that appears to other users of the portal. |
| Active Answering Rule | Your extension can have multiple answering rules. For example, you might ring your phone in one mode or forward to your cell in another mode. In this field, you can which answering rule is the active rule. |
| Active Phones | Your extension may have multiple phones (for example, one in the office and one at home). This field shows which handsets are currently online. |

# Voicemail

You can configure voicemail using the Messages page. This page has two tabs for handling voicemail:

- **Messages** — see “Messages” below.
- **Settings** — see “Voicemail Settings” on the next page.

To display the Messages page, click the **Messages** icon at the top of the page:




## Messages

The **Messages** tab allows you to manage your new, saved, and deleted voicemail, as well as greetings and other settings.


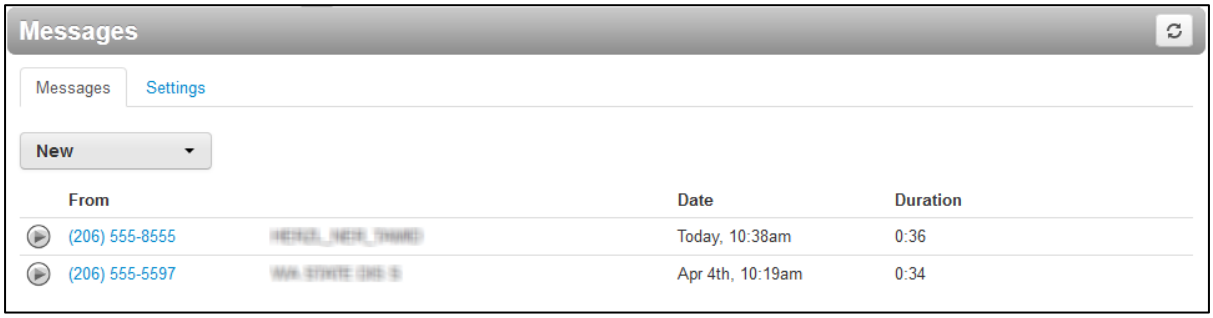



**Figure 2-5. Messages Page**

Like the Home page, you can play messages, click a number to call it back, and download, save, forward, and delete messages. To see all the controls available, hover the mouse pointer over a message.

The **New** drop-down list allows you to review New, Saved, and Trash (recently deleted) messages.



## Voicemail Settings

Clicking the **Settings** tab displays options for controlling your voicemail order, timestamps, greetings, and voicemail to email.

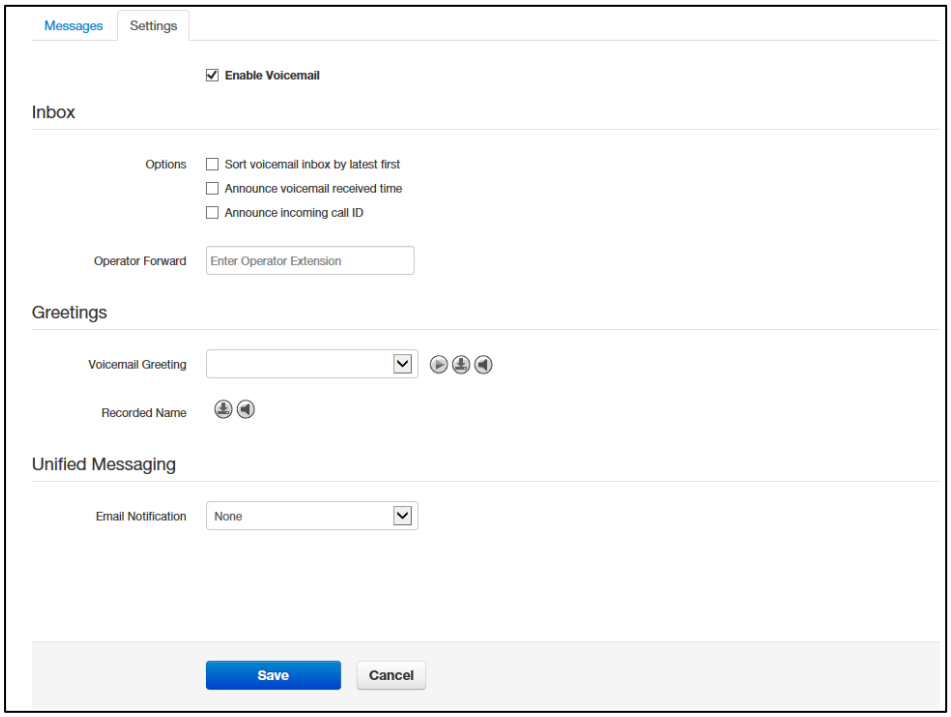



**Figure 2-6. Settings Tab**

**Table 2-2. Fields in the Settings Tab**

| Field | Description |
|---|---|
| Enable Voicemail check box | Enables (check) or disables (uncheck) voicemail. |
| Inbox | These options affect audio voicemail (calling in) but not the portal.<br>• Sort Voicemail inbox by latest first = plays your newest messages first.<br>• Announce voicemail received time = plays the timestamp of the message.<br>• Announce incoming call ID = plays the caller ID number if available.<br>• Operator Forward = option to press 0 in a mailbox greeting and be directed elsewhere. |
| Greetings | Allows you to select an active voicemail greeting, listen to it, and record a new greeting.<br>• To select the active voicemail greeting, click it from the pull-down menu and click Save.<br>• To listen to a selected greeting on your PC, click the play button: <br>• To record a greeting, see “Recording a Greeting” on page 19. |

| Field | Description |
|---|---|
| Unified Messaging | Provides the following selections for adjusting your voicemail to email settings.<br>• None = no email is sent when voicemail is left.<br>• Send w/ hyperlink = a link to the voicemail is emailed to you.<br>• Send w/ brief hyperlink = a link to the voicemail in plaintext is emailed to you.<br>• Send w/ attachment (*storage option*) = an email is sent to you with the audio file of the message attached. The *storage option* allows you to leave messages in your inbox as new, move to saved, or move to trash.<br>• Send w/ brief attachment (*storage option*) = an email is sent to you in plaintext with the audio file of the message attached. The *storage option* allows you to leave messages in your inbox as new, move to saved, or move to trash. |

## *Recording a Greeting*

➢ **To record a greeting**

1. From the **Settings** tab of the Messages page, click the speaker icon .

   *A Manage Greetings page similar to the one in Figure 2-7 appears.*

**[Illustration on next page]**


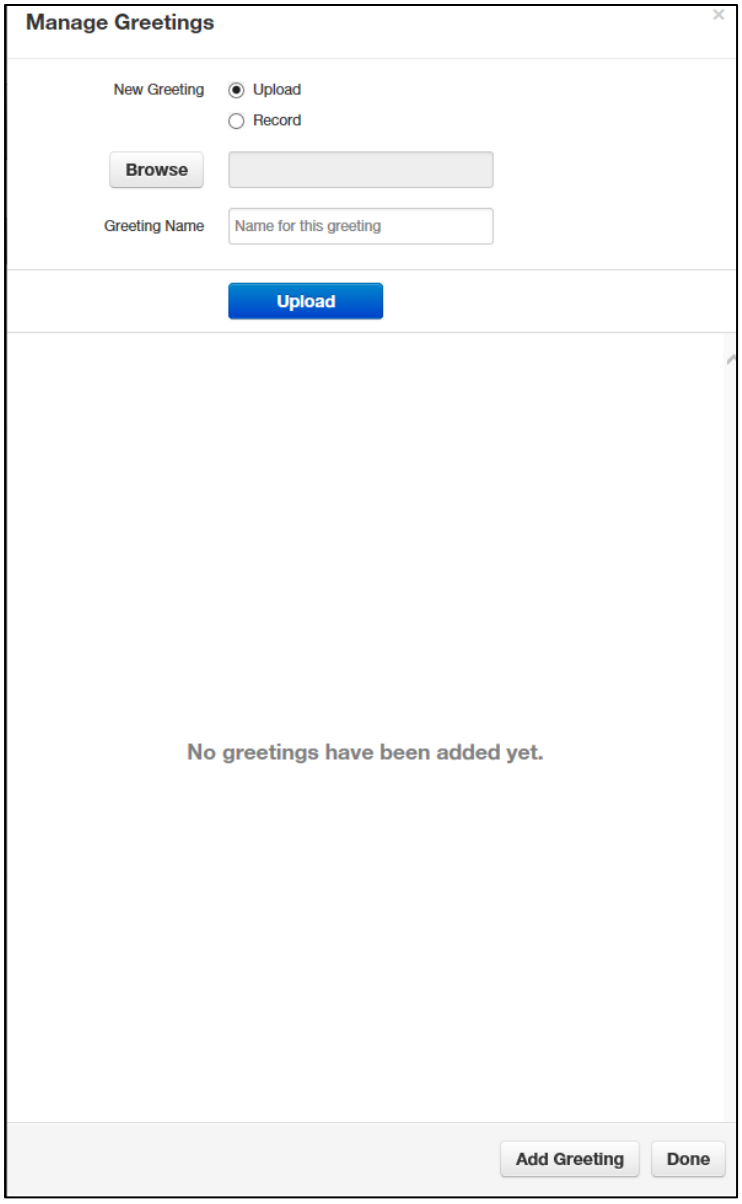



**Figure 2-7. Manage Greetings Page**

2. Next to **New Greeting**, click **Record**.

   *The **Browse** button changes to a **Call me at** field.*

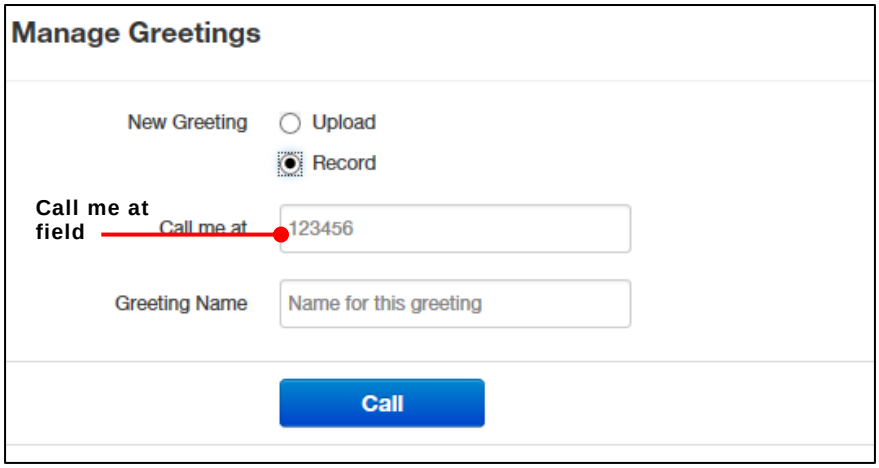


3. In the **Call me** at field, enter a number to call. This can be an extension or a telephone number such as your cell phone.
4. In the **Greeting name** field, enter a name for this greeting.
5. Click the **Call** button.
6. At the prompt, record the new greeting. When you finish the greeting, press #.
7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.

### *Uploading a Greeting*

➢ **To upload a greeting**

1. From the **Settings** tab of the Messages page, click the speaker icon .

   *A Manage Greetings page similar to the one in Figure 2-7 on page 20 appears.*
2. Hover over a greeting. Options appear for editing, deleting, or renaming the greeting.
3. Next to **New Greeting**, click **Upload**.
4. Click the **Browse** button.
5. In the Choose File to Upload dialog box, select a WAV or MP3 recording from your PC, and then click **Open**.

   *The path and file name appear in the **Browse** field.*
6. Click **Upload**.
7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.

### *Recorded Name*


If your company has a dial-by-name directory, you must record your name for the directory to be found. You can click the play button to listen to your current name recording on your PC or click the speaker button to record or upload a new name recording.

# Answering Rules and Time Frames

Though Answering Rules and Time Frames are separate tabs, they are so interconnected that describing them together makes sense.

## Time Frames


Time frames allow you to control the scheduling of the system. You configure time frames using the Time Frames page. To display this page, click the **Time Frames** icon at the top of the page:




Three common time frames are:

- Open Hours (for example, M-F 9am-5pm)
- Holidays (Independence Day, Thanksgiving, New Year's, and so on)
- Closed Hours (all other times)


Time frames can be both shared (system-wide and set by the administrator) or personal to your extension. You can add a time frame to your extension by clicking the **Add Time Frame**.

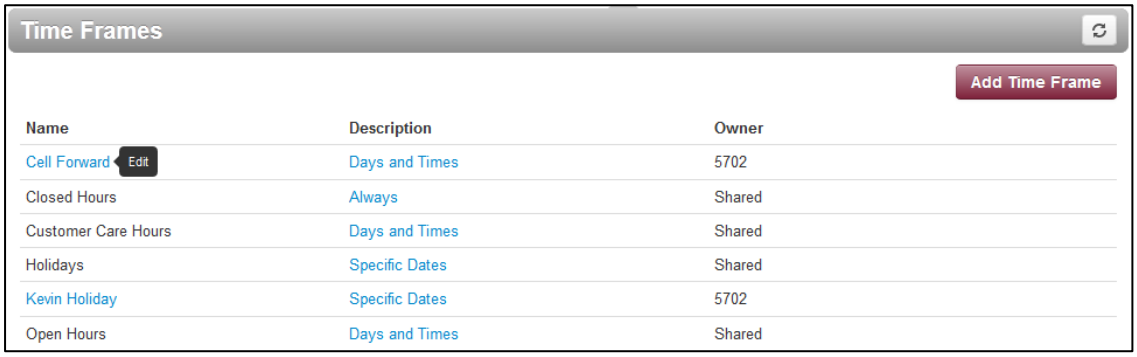

### To add time frames

1. From the Time Frames page, click **Add Time Frame**.

   *The Add a Timeframe page appears.*

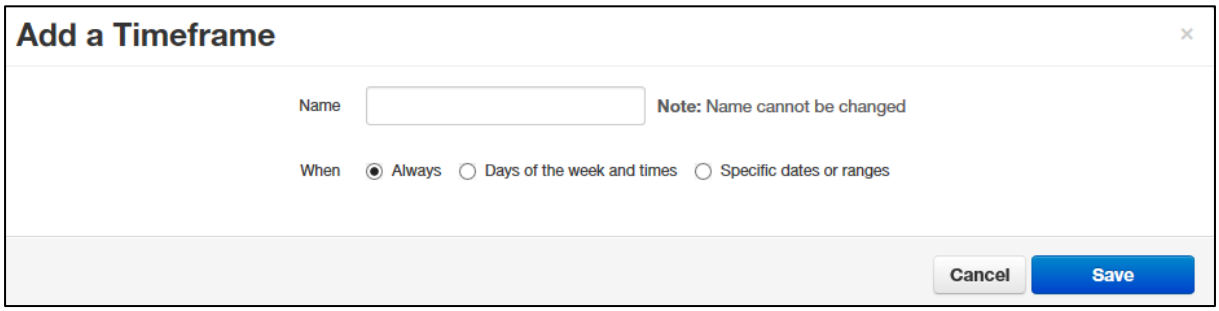


2. In the **Name** field, enter a name for this time frame.
3. Next to **When**, select the time period when the time frame will be applied:
   - **Always** = select this option if the time frame will always be applied. Click **Save** to complete the procedure.
   - **Days of the week and times** = select this option to select days and times when the time frame will be applied. Proceed to “If you select Days of the week and times” on page 24.
   - **Specific dates or ranges** = select this option to specify a specific date or range of dates. Proceed to “If you select Specific dates or ranges” on page 28.

### *If you select Days of the week and times*

Options appear for selecting days and times when the time frame will be applied (see Figure 2-8).



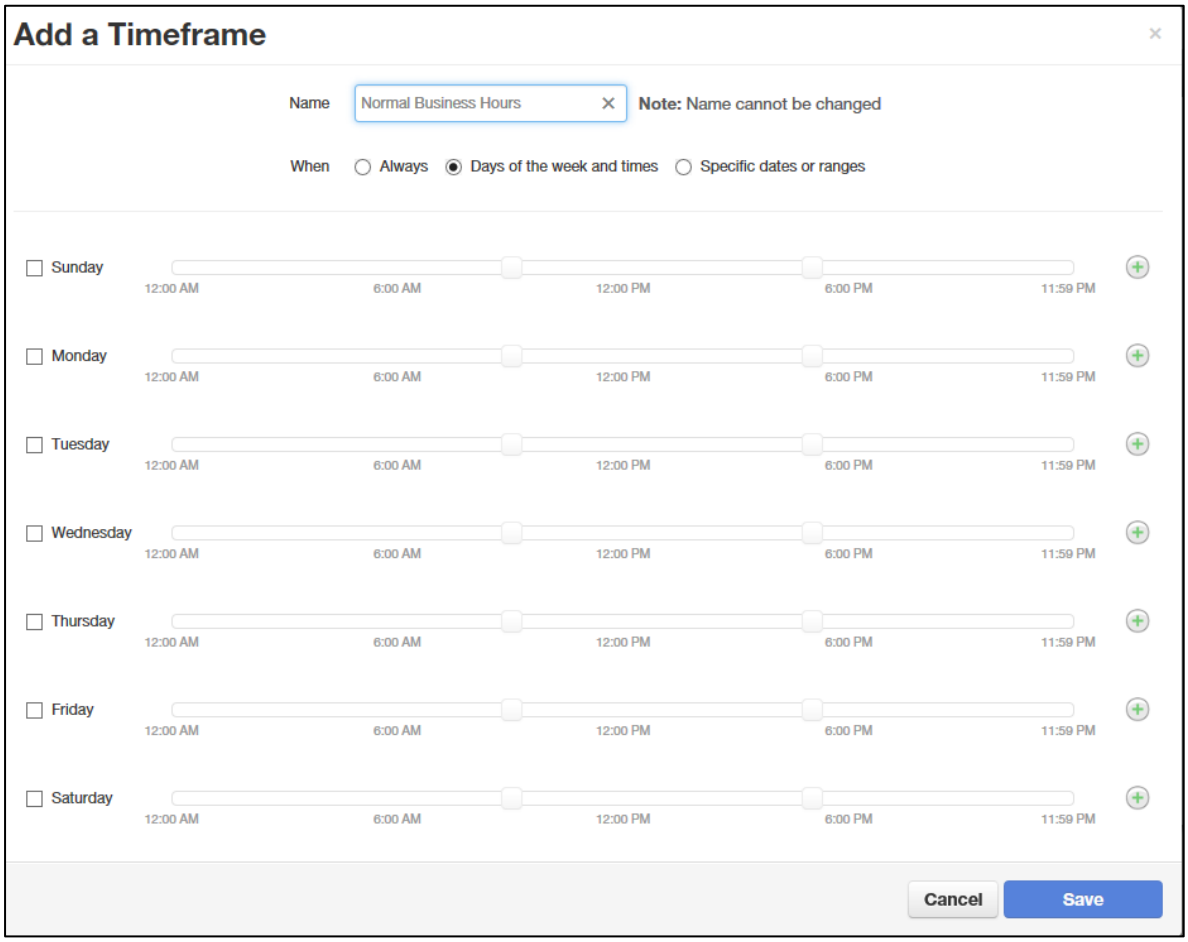



**Figure 2-8. Setting Days of the Week and Times**

1. Using the check boxes next to the name of each day of the week, check the days when the time frame will be applied. A blue line to the right of checked day shows the default hours for this time frame (9:00 AM through 5:00 PM).

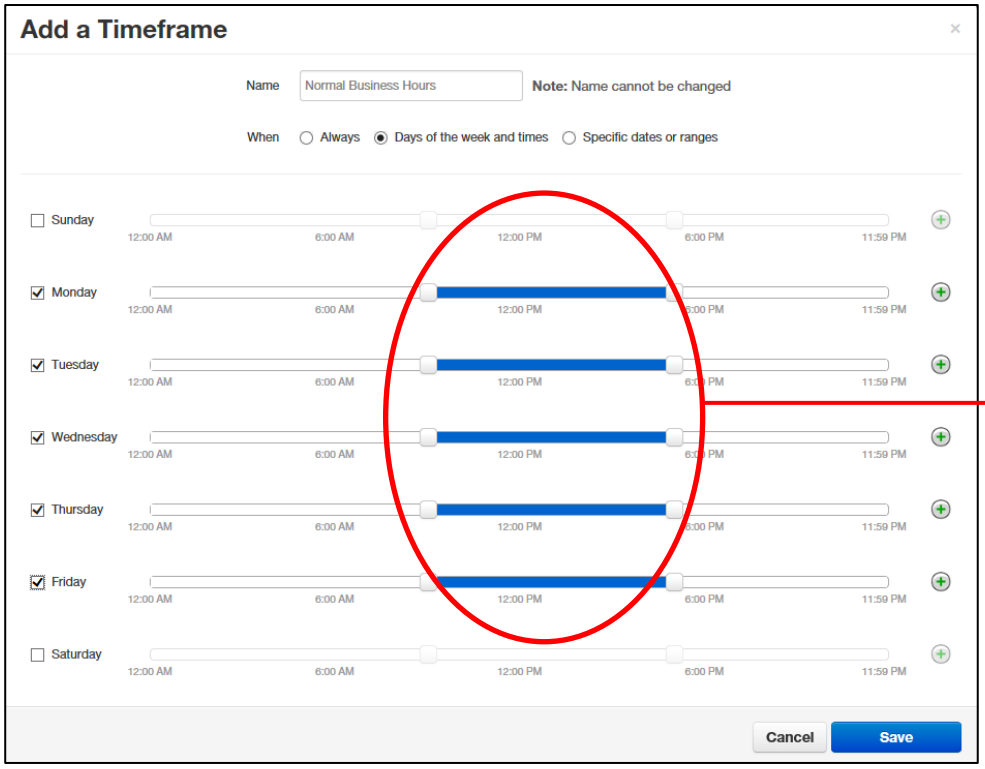


2. To change the start time, drag the button on the left side of the blue bar either to the left to begin the start time earlier or to the right to begin the start time later.

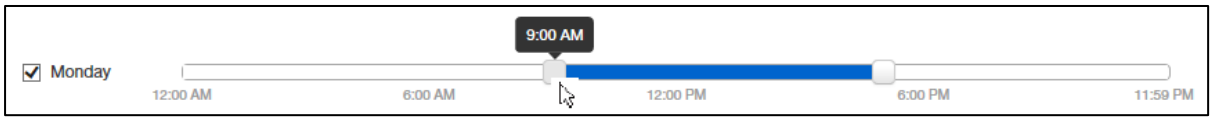



3. To change the end time, drag the button on the right side of the blue bar either to the left to shorten the end time or to the right to lengthen the end time.




**Hint**: *To fine-tune start and end times, click start time or end time button, and then use the left and right arrow keys on your keyboard to change the time in 5-minute increments*.


4. By default, each day is made up of one time period. However, you can use the  icon to define two time periods per day. For example, the figure below shows a setup for an office that answers calls in the morning and afternoon, and then transfers calls to an answering

service over lunch, on Monday through Friday. By doing this, you would create two (2) time frames (for example, one from 8 to noon and another from 1:00 to 5:00 PM).

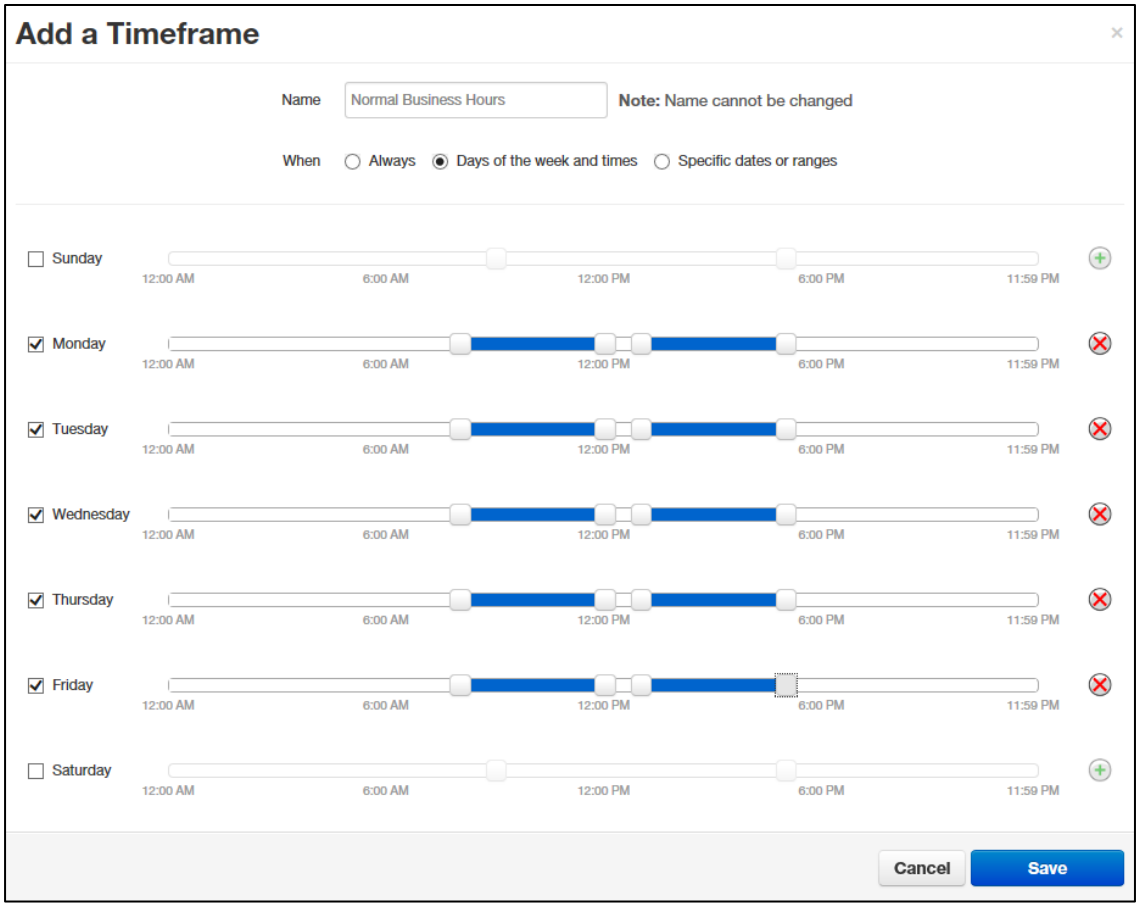



5. Click **Save** to save your selections.

   *The time frame appears as a row on the Time Frames page.*

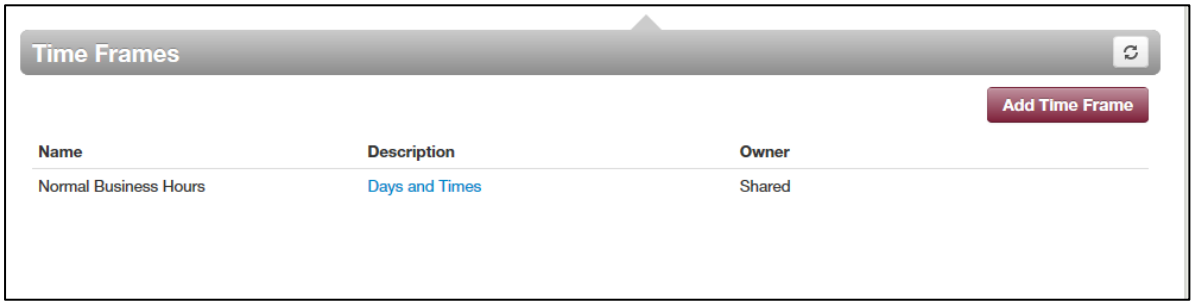

**Hint**: *Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.*

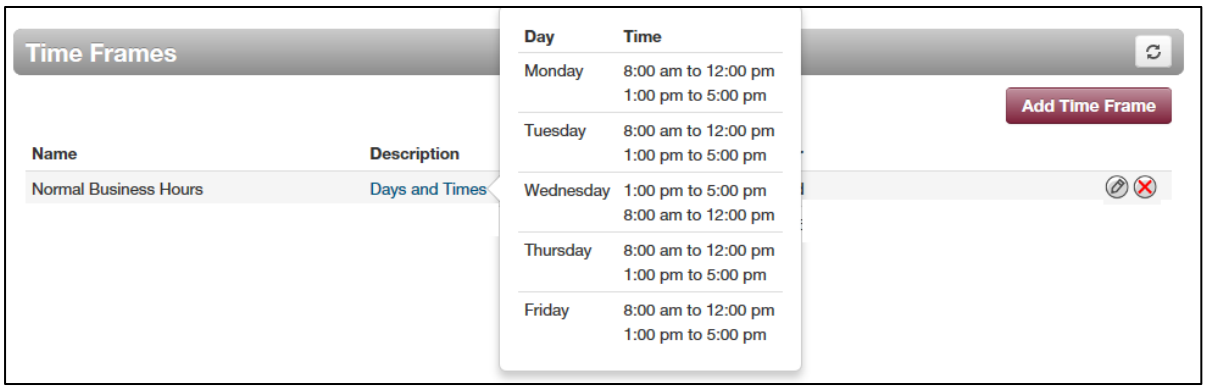

### *If you select Specific dates or ranges*

Fields appear for entering dates or ranges (see Figure 2-9).



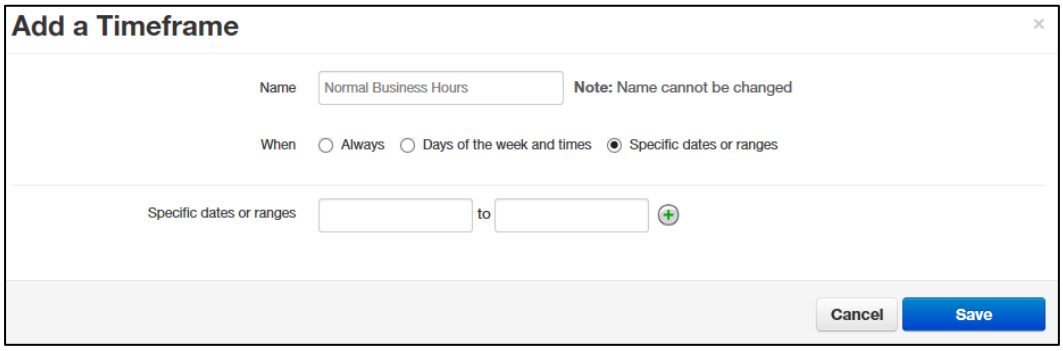



**Figure 2-9. Setting Dates or Ranges**

1. Click in the left field, and then select a starting date and time from the pop-up calendar.

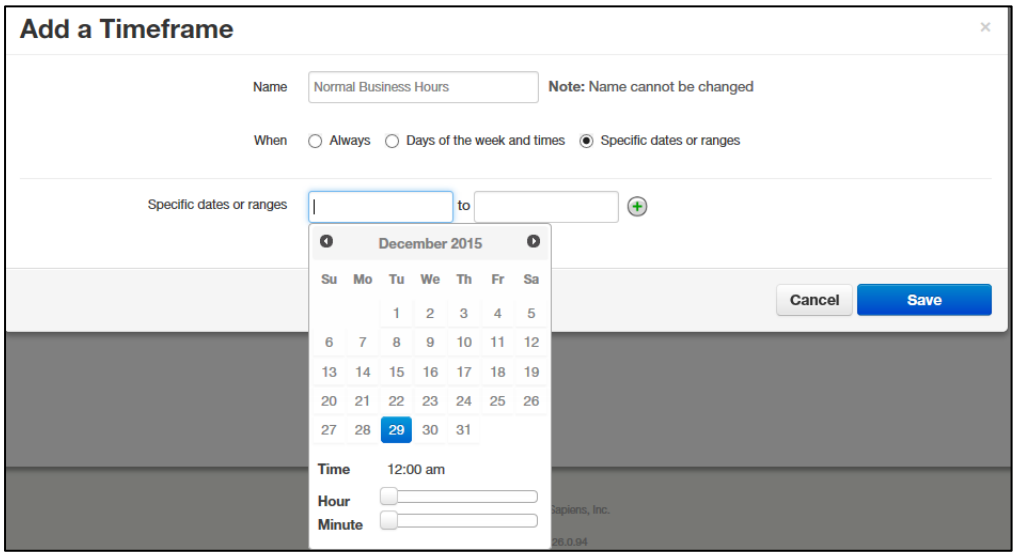



2. Click in the right field, and then select an ending date and time from the pop-up calendar.
3. To specify additional ranges, click the icon to display another row of fields, and then repeat steps 1 and 2 in the new fields. Repeat this step for each additional date or range you want to specify. To delete a date or range, click the icon next to the appropriate row.

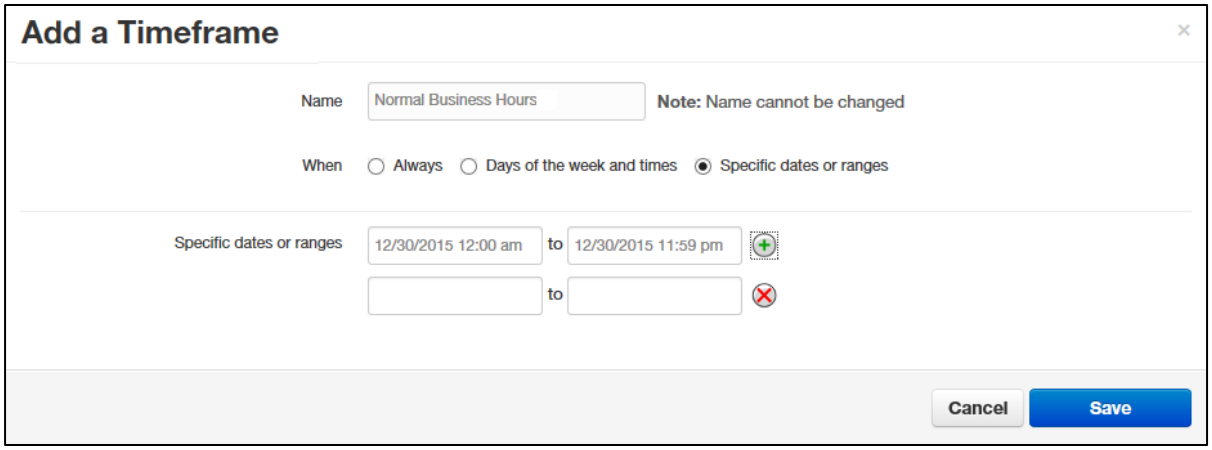



4. Click **Save** to save your selections.

   *The time frame appears as a row on the Time Frames page.*

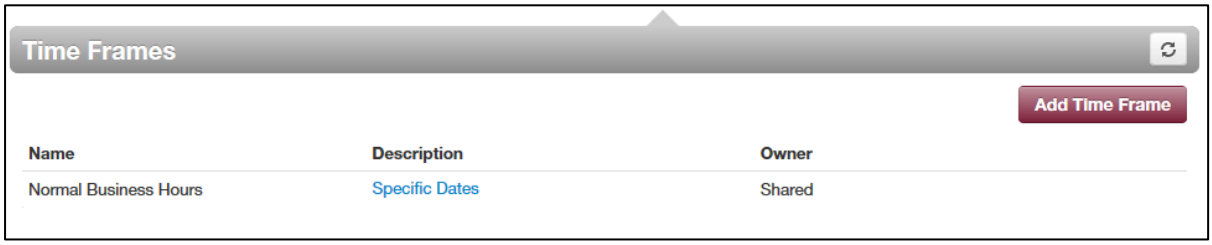



**Hint**: *Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.*

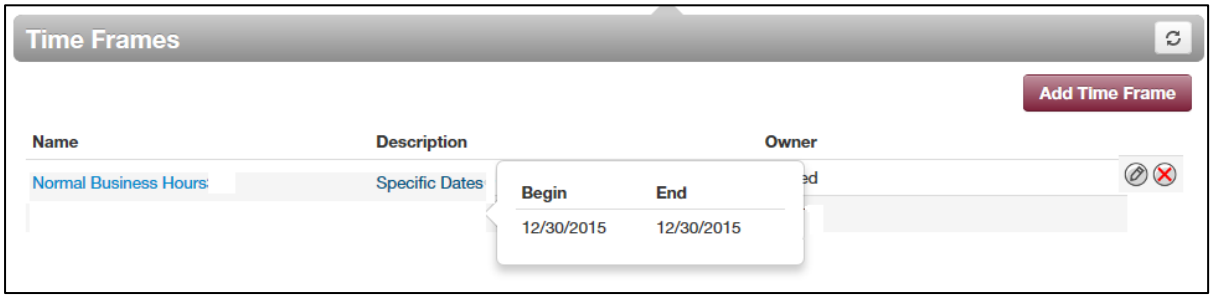

## Answering Rules

After you set up your time frames, you can create different answering rules for your time frames. You can configure answering rules using the Answering Rules page. To display this page, click the **Answering Rules** icon at the top of the page:




The left side of the Answering page has a **Rings for *n* seconds** drop-down list that allows you to specify the maximum ring time (one ring is generally 5 seconds). When that time expires, the caller will be forwarded to the **Call Forward When Unanswered** rule if defined; otherwise, the caller will be forwarded to voicemail if enabled. The right side of the Answering Rules page has buttons for adding answering rules and specifying allowed and blocked numbers.

Figure 2-10 shows examples of answering rules. In this figure:

- The extension has a rule to simultaneously ring many desk phones during Open Hours.
- **Cell Forward** rings many desk phones and a cell phone simultaneously.
- Holiday and closed hour rules go straight to voicemail.

The active rule is the topmost rule that matches the conditions in the corresponding time frame. In Figure 2-10, for example, the time is around 1pm on Friday, so both **Open Hours** and **Cell Forward** rule match the time/day condition, but **Open Hours** is active because it is the topmost rule. You can change the order by using the arrows at left of each rule to drag the rules.

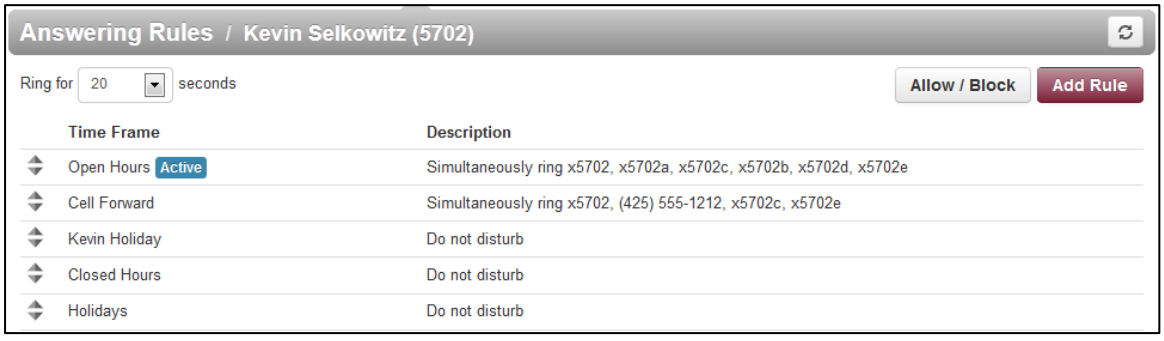



**Figure 2-10. Sample Answering Rules**

### To add an answering rule

1. From the Answering Rules page, click **Add Rule**.

   *The Add an Answering Rule page appears. From this page, you can create rules to screen callers, forward calls, and ring multiple numbers simultaneously.*

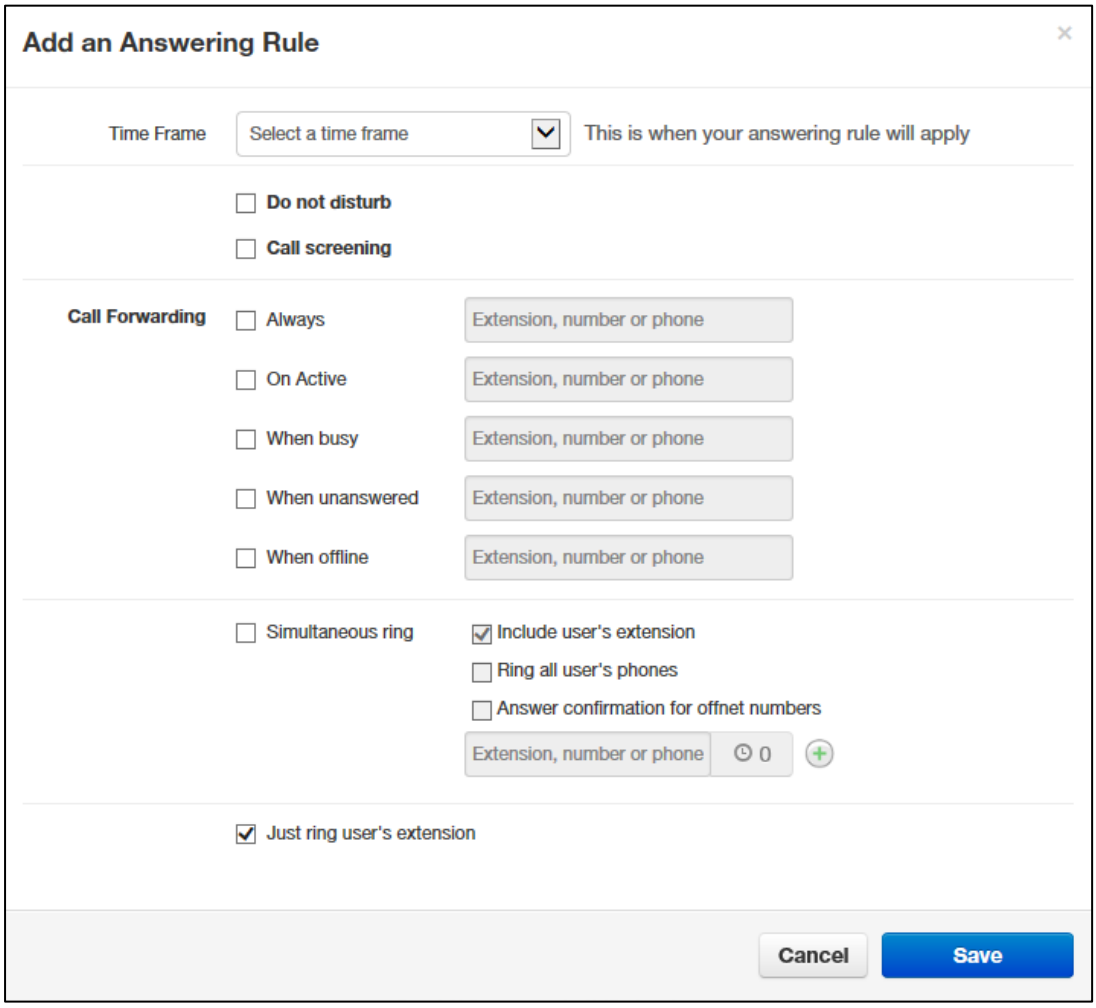



**Figure 2-11. Add an Answering Rule Page**

2. Complete the fields in the Add an Answering Rule page (see Table 2-3).
3. Click **Save**.

### Table 2-3. Fields in the Add an Answering Rule Page

| Field | Description |
|---|---|
| Time Frame | Select the time frame when this answering rule will apply. |
| Do not disturb | No phone rings, goes straight to voicemail if available. |
| Call screening | Prompts caller to say their name, lets you screen the call before accepting. |
| Call Forwarding Always | Immediately forwards to the number specified. See “Call Forward Drop-down Options” below. |
| Call Forwarding On Active | Forward calls to the number specified when you have one or more calls active. See “Call Forward Drop-down Options” below. |
| Call Forwarding When Busy | Forwards calls to the number specified when your extension has used all available call paths. See “Call Forward Drop-down Options” below. |
| Call Forwarding When Unanswered | Forwards calls to the number specified if the call is not answered after the specified ring timeout. See “Call Forward Drop-down Options” below. |
| Call Forwarding When Offline | Automatically forwards if your desk phone loses communication (such as during a power outage). See “Call Forward Drop-down Options” below. |
| Simultaneous ring | Rings many phones at once. Check box options allow you to:<br>• Include the user’s extension.<br>• Ring all your user’s phones.<br>• Use the option “Answer confirmation for offnet numbers” to ensure that a person — and not voicemail — answers simrings to a cell/landline by prompting the answering party to press 1 to accept the call. An icon to the right of this option allows you to specify a ring delay.<br>Note: A simring rings handsets, not users. So, for example, if 111 is listed, the simring will ring handset 111. If user 111 has a call forward set to their cell, however, the simring will not occur at the cell since simring rings handsets, not users. |
| Just ring user’s extension | Rings just your phone. |

## Call Forward Drop-down Options

When entering an extension as a call forward option, a drop-down list allows you to forward the call to specific resources associated with that extension. Table 2-4 describes the options. Some options may not appear, depending on the features associated with the extension.

### Table 2-4. Call Forward Drop-down Options on the Add an Answering Rule Page

| Field | Description |
|---|---|
| Handset | Bypasses the user answering rules and forwards to the handset associated with the specified user. |
| User | Forwards to the user at that extension and follows the user’s answering rules. |
| Voicemail | Forwards to voicemail at the specified extension. |
| Queue | Forwards to the queue associated with that user. |
| Auto attendant | Forwards to the auto attendant associated with that user. |
| Conference | Forwards to a Conference bridge |

## Ring Timeout

At the top of the page is the ring timeout selection. This option specifies the number of seconds that your phones will ring or forwarding rule before going to voicemail (when available).

## Allowing or Blocking Callers

The Answering Rules page has an **Allow/Block** button that allows you to permit or block calls from certain numbers. Using this feature, you can block unwanted calls to your phone, as well as calls from anonymous and unwanted numbers. Allowed numbers bypass user Do Not Disturb and Call Screening rules to ring through immediately.

1. From the Answering Rules page, click **Allow/Block**.

   *The Allow/Block page appears. This page has two lists, one for allowed phone numbers (on the left) and another for blocked phone numbers (on the right).*

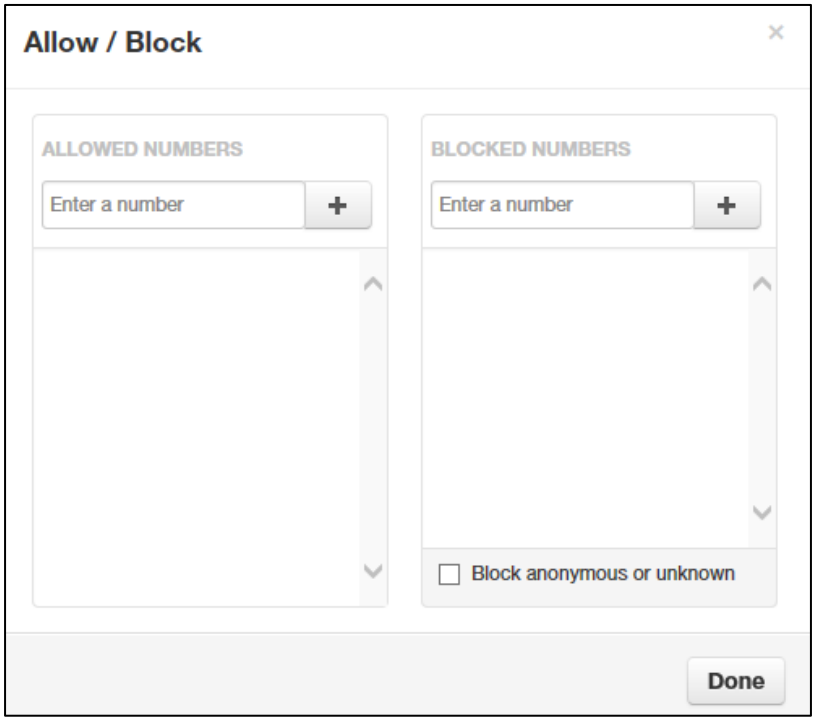



**Figure 2-12. Allow/Block Page**

2. To allow phone numbers, perform the following steps under **ALLOWED NUMBERS**:
   a. Click in the **Enter a number** field.
   b. Enter the number you want to allow.

c. Click the + button. The number appears in the **ALLOWED NUMBERS** list and a brief message tells you the allowed number was added.

d. To add more numbers, repeat step 2.

e. To remove a number, click the ✖ button next to that number.

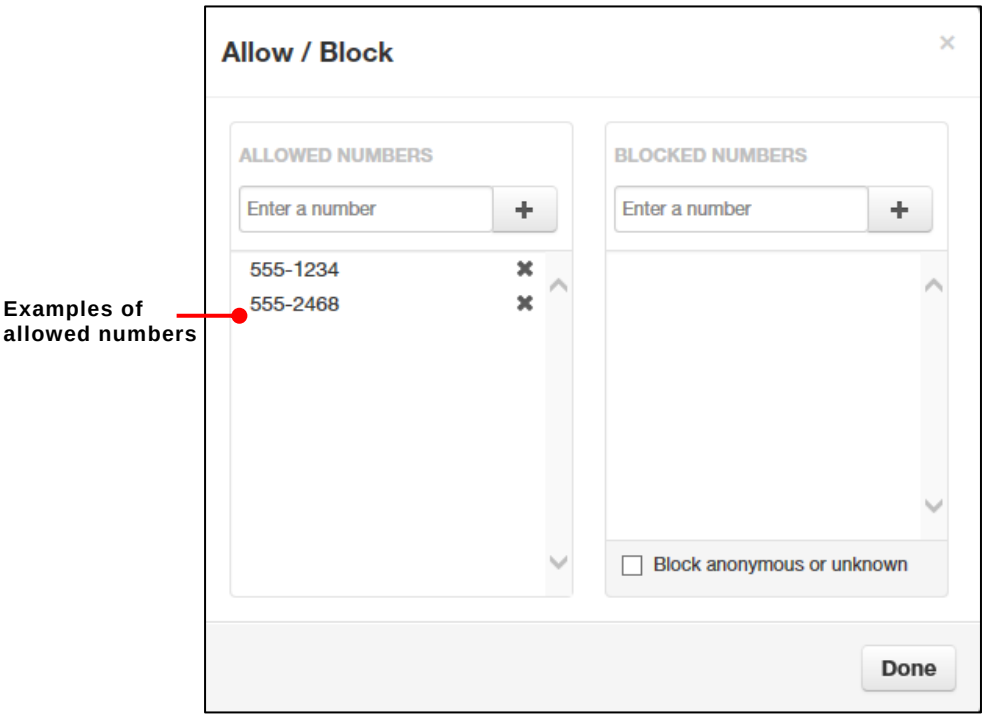



**Figure 2-13. Example of Allowed Numbers**

**Hint:** *You may use this feature to allow Priority calls to ring through while disallowing other calls when you activate "Do Not Disturb" or "Call Screening" functionalities.*

3. To block phone numbers, perform the following steps under **BLOCKED NUMBERS**:

   a. Click in the **Enter a number** field.

   b. Enter the number you want to block.

   c. Click the + button. The number appears in the **BLOCKED NUMBERS** list and a brief message tells you the blocked number was added.

   d. To add more numbers, repeat step 3.

   e. To remove a number, click the ✖ button next to that number.

4. To block anonymous calls and calls from unknown numbers, check **Block anonymous or unknown**.

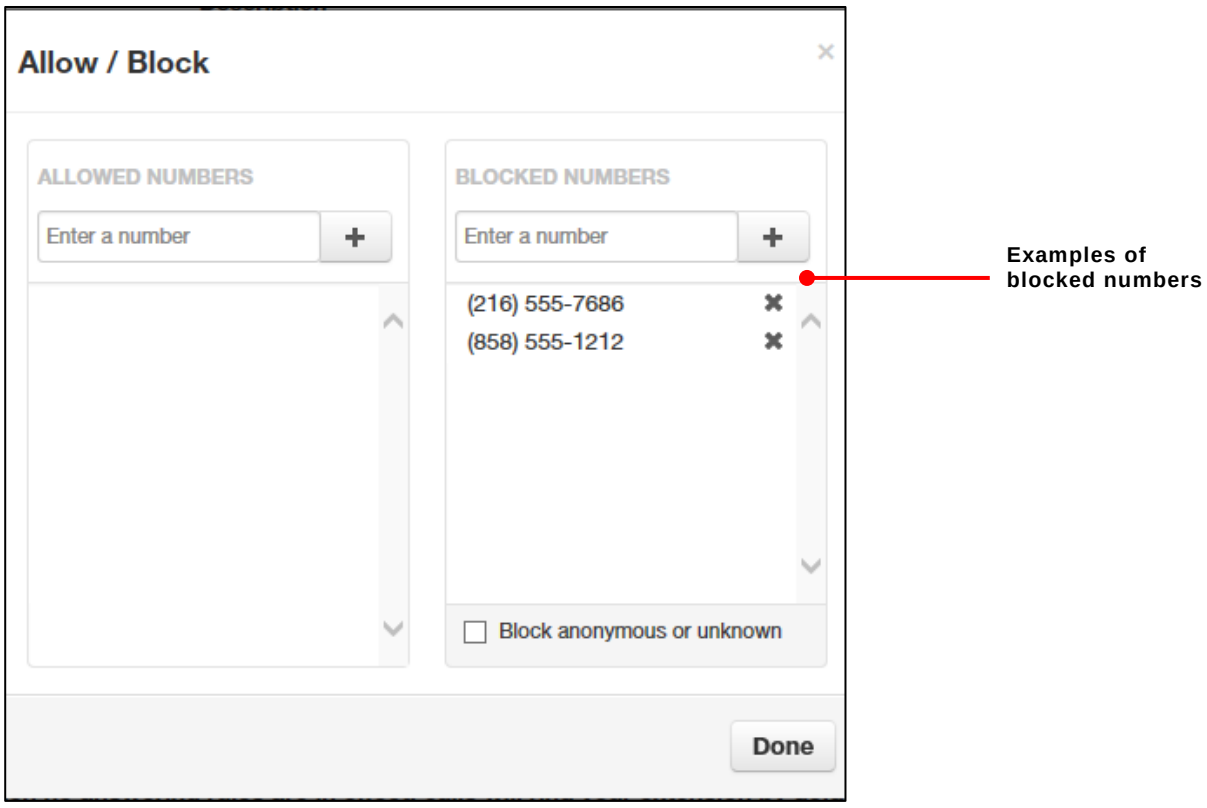




**Figure 2-14. Example of Blocked Numbers**

5. When you are finished, click **Done**.


# Contacts

By default, contacts contain all the extensions on your system. However, you can add contacts to enable easier access to everyone you need to reach.

You can configure contacts using the Contacts page. To display this page, click the **Contacts** icon at the top of the page:




The following figure shows an example of a Contacts page. The sections following the figure describe the key areas on the page.

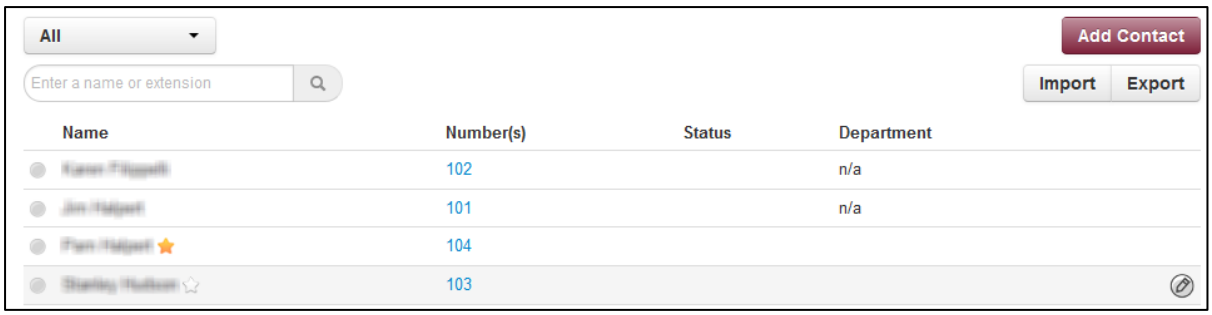


## Filter and Search

The **All** pull-down list allows you to search contacts by group. Using this list, you can select groups to search such as Favorites, Departments, Available, Busy, and more. Selecting a group filters the contacts on the page to show only the ones located in the group selected.

The **Enter a name or extension** field below the drop-down list allows you to search by contact name or extension. Entering a name or extension in this field filters the contacts on the page to show only the ones that match your entry. Click the ⊠ in this field to delete your entry and redisplay all contacts.

## Add and Import Contacts

The **Add Contact** button allows you to add a contact one at a time. These are for external contacts only. Your contact list will automatically update with your internal extensions.


Import will allow you to select a file from your PC, the import can accept CSVs from Microsoft Outlook and Gmail as well as vCards.

### *Adding a Contact*

➢ **To add a contact**

1. From the Contacts page, click **Add Contact**.

   *The Add Contact page appears.*

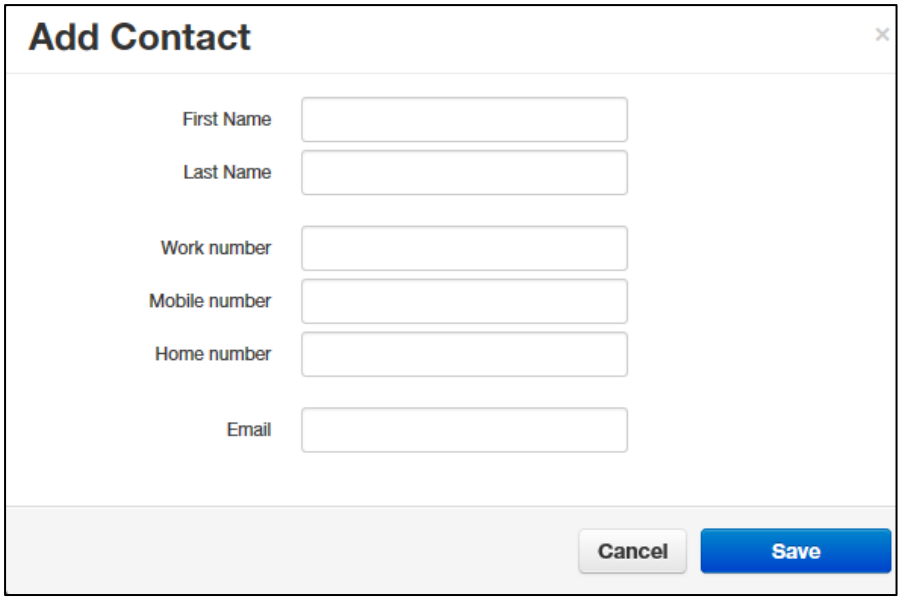


2. Complete the fields in the Add Contact page (see Table 2-5).
3. Click **Save**.

   *The contact appears on the Contacts page.*

**Table 2-5. Fields in the Add Contact Page**


| Field | Description |
|---|---|
| First Name | Contact's first name. |
| Last Name | Contact's last name (surname). |
| Work number | Contact's work telephone number. |
| Mobile number | Contact's mobile telephone number. |
| Home number | Contact's home telephone number. |
| Email | Contact's email address. |

### *Importing Contacts*

➢ **To import contacts**

1. From the Contacts page, click **Import**.

   *The Import Contacts pop-up window appears.*

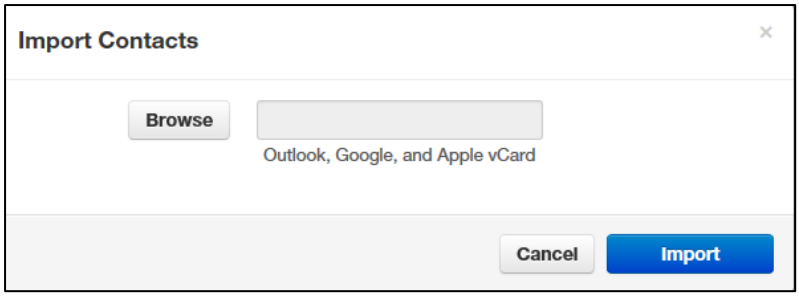


2. Click the **Browse** button.
3. In the Choose File to Upload dialog box, go to the location where the file you want to import is located. Click the file, and then click **Open**.

   *The path and file appear in the **Browse** field.*

4. Click **Import**.

   *The imported contacts appear on the Contacts page.*

## Selecting Favorites

When hovering over a contact, a light gray star appears next to the contact name. Clicking the star selects the contact as a favorite and changes the color of the star to yellow.

## Editing Contacts

When hovering over a contact you'll see an edit button on the far right, click that button to edit the contact.

# Phones

The Phones page allows you to manage your phones. To display the Phones page, click the **Phones** icon at the top of the page:





Each row shows a phone that has been added to the system, along with:

- Whether the phone is registered.
- The phone name and device type. The hyperlink below the **Name** column allows you to edit the phone information. You can also edit or delete phones using icons on the right side of the row.
- The phone's IP address, MAC address, and line number on the phone associated with your extension.

Clicking the Refresh button  updates the information shown on the page.

The page has an **Add** Phone button that adds phones to your system. This task usually is performed by administrators having *admin scope* and is not described in this guide.

The Phones page also has a **MobileUC** button that allows you to access Voradian MobileUC™/ MobileReach™. Voradian MobileUC/ Reach is a mobile app that turns your cell phone into an extension of your Voradian Hosted PBX. Make and receive calls with the same identify as being in the office along with managing your voicemail, answering rules, and contacts. To start using MobileUC/ Reach, see "Using Voradian Mobile " on page 40.

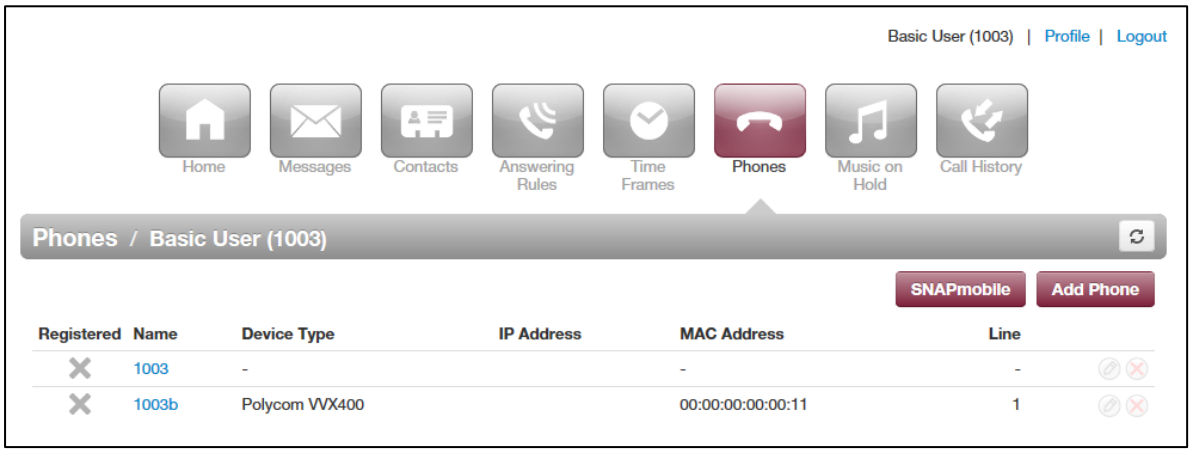

## Using Voradian MobileReach™ / MobileUC

### ➢ To use MobileUC

1. From the Phones page, click **MobileReach / MobileUC.**

   *The splash screen in Figure 2-15 appears.*




**Figure 2-15. Voradian MobileReachUC Splash Screen**

2. Scan the QR code to download the app or search for Voradian MobileUC in the app store (*under ReachUC*), and then enter the information from that page into the Voradian MobileUC logon screen.


# Music On Hold

Music on Hold allows you to specify personal music on hold for your extension. You configure music on hold files using the Music-On-Hold page. To display this page, click the **Music on Hold** icon at the top of the page:




The **Add Music** button allows you to add music on hold files. When you add music on hold files, the file name appears on the Music On Hold page, along with the duration and file size. The **Settings** button allows you to play an introductory greeting.

If you hover over a file you can see options to play the file, download the file, edit the name, or delete the file. If multiple files are uploaded you can rearrange them using the arrows at the left of the page.

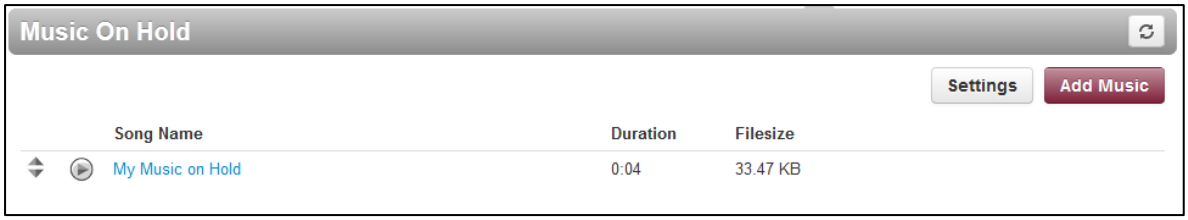



## Adding Music on Hold Files

➢ **To add music on hold files**

1. From the Music On Hold page, click **Add Music.**

   *The Add Music page appears.*

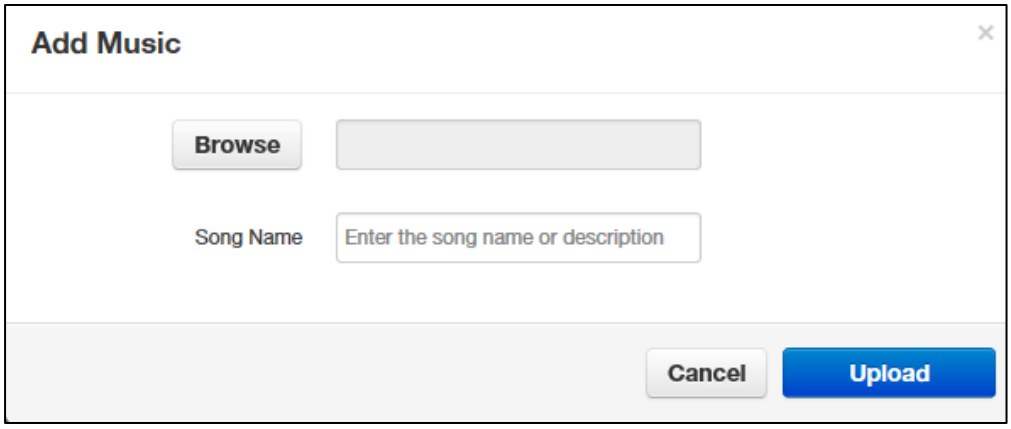


2. Click the **Browse** button.
3. In the Choose File to Upload dialog box, go to the location where the file you want to import is located. Click the file, and then click **Open**.

   *The path and file appear in the **Browse** field.*
4. In the **Song** Name field, enter a name for the song.
5. Click **Upload**.

   *The music file appears on the Music on Hold page.*


***NOTE:*** *The music file must be in MP3 or WAV format and must be properly licensed. You shall not use unauthorized or unlicensed copyrighted materials including but not limited to music, voice prompts, and or on-hold messaging, in our system. Any such use is a violation of federal and international law. Audio files used without proper license or authority will be deleted from our system without prior notice. Repeated violations will result in denial of your ability to access this function. Voradian reserves the right to request copies of licenses and inspect proof of authority to use copyrighted materials within our system. Also see Voradian's "terms of use" policy.*

## Playing an Introductory Greeting

➢ **To play an introductory greeting before having the music on hold file play**

1. From the Music-On-Hold page, click **Settings.**

   *The Music on Hold Settings page appears.*

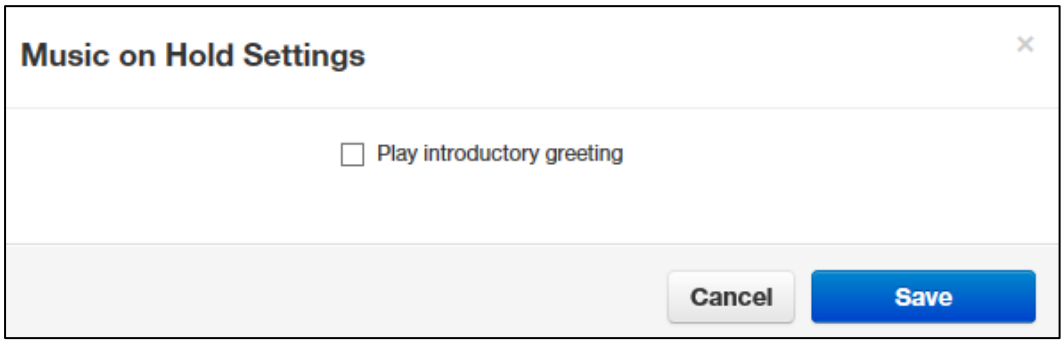


2. Check **Play introductory greeting**.
3. Click **Save**.


# Call History


The Call History page shows a log of all your extensions calls. It also provides tools to filter and export data.

The left side uses color-coded icons to represent call status:

- **Green** = outbound calls
- **Blue** = inbound received calls
- **Red** = missed calls

Moving your screen pointer over an icon displays a tooltip with the call status. For example:

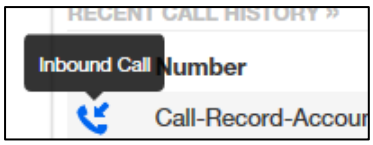






You can click a number in the **Number** column dial back the number. Clicking the Refresh button  updates the information shown on the page.

To display the Call History page, click the **Call History** icon at the top of the page:

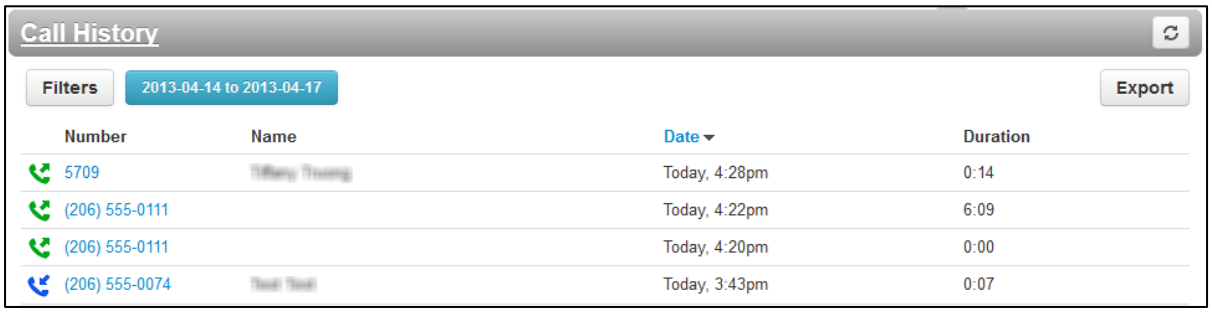


The following figure shows an example of the Call History page. The sections following the figure describe the **Filters** and **Export** buttons.




## Filtering the Call History

The **Filters** button allows you to filter the information displayed in the Call History page, so you can view only the information that interests you.

➢ **To filter the call history**

1. From the Call History page, click **Filters**.

   *The Call History Filters page appears.*

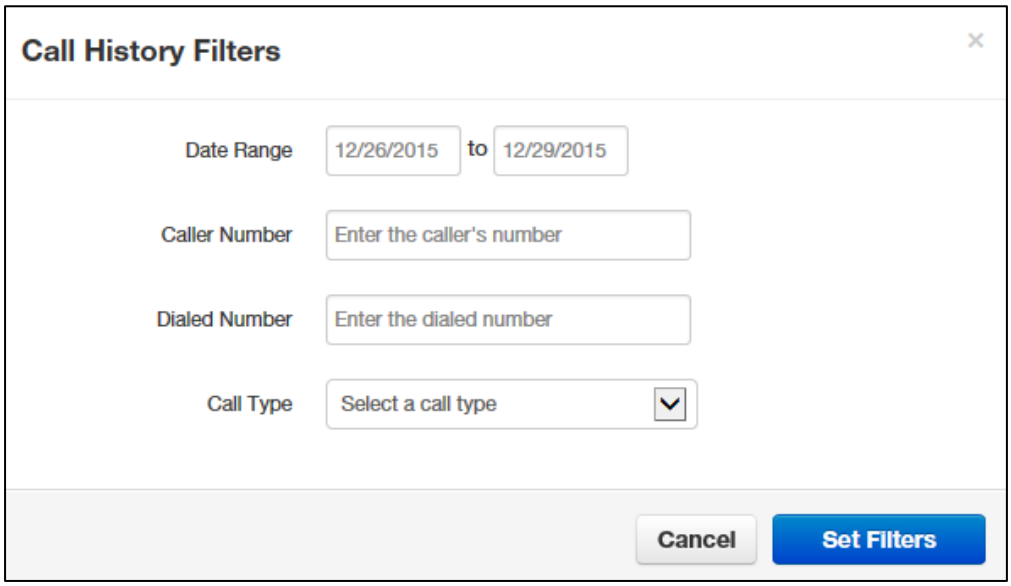



2. Complete the fields in the Add Contact page (see Table 2-6).
3. Click **Set Filters**.

   *The Call History page appears, with only the items that match your criteria.*

### Table 2-6. Fields in the Call History Filters Page

| Field | Description |
|---|---|
| Date Range | To filter by a specified date range, click in the left field, and then select a starting date and time from the pop-up calendar (see Figure 2-16). Click in the right field, and then select an ending date and time from the pop-up calendar. |
| Caller Number | To filter by a caller number, enter the caller's number. |
| Dialed Number | To filter by a dialed number, enter the dialed number. |
| Call Type | To filter by type of call, select a call type. |

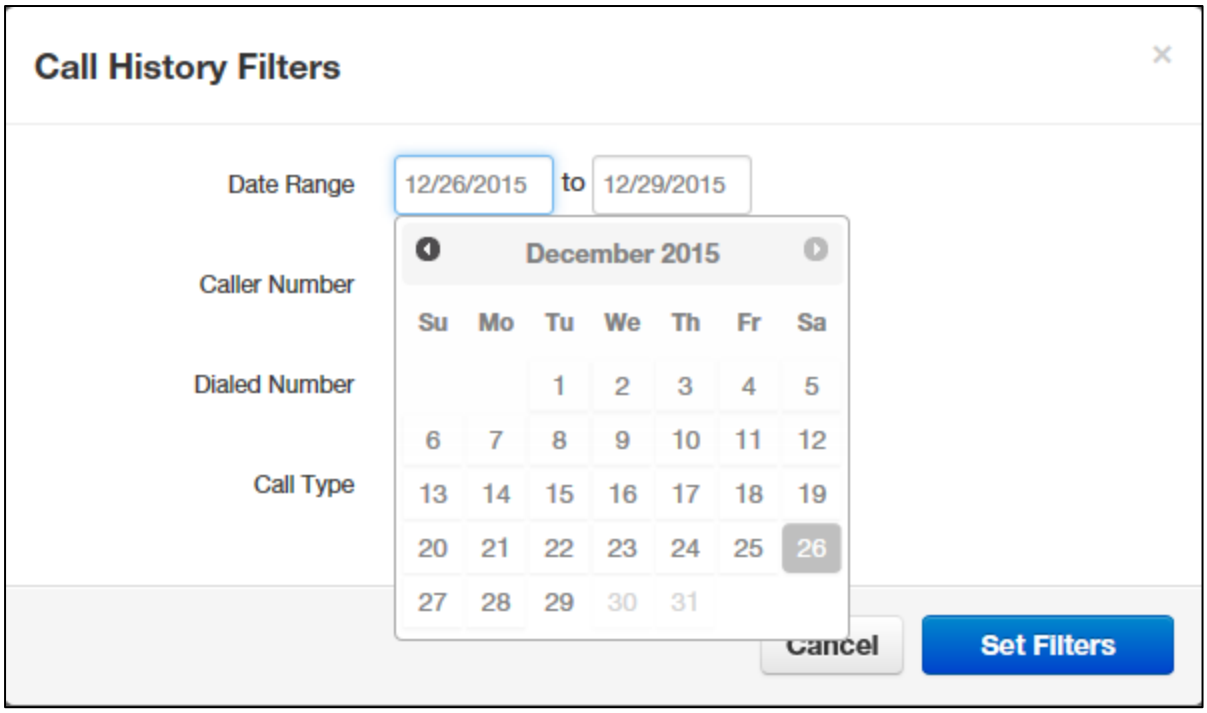


### Figure 2-16. Selecting a Start Date from the Pop-up Calendar

## Exporting the Call History Log

- **To export the call history log**


1. From the Call History page, click **Export**.

   *Depending on your browser, the history log is downloaded to your computer or you are prompted to save the log. The log is in comma-separated-value (CSV) format.*

2. After downloading the log, you can open it using Microsoft Excel, Google Docs, and other spreadsheet applications.

# Profile

Clicking the **Profile** link at the top-right of the page displays the Profile page. From this page, you can configure the settings in Table 2-7.

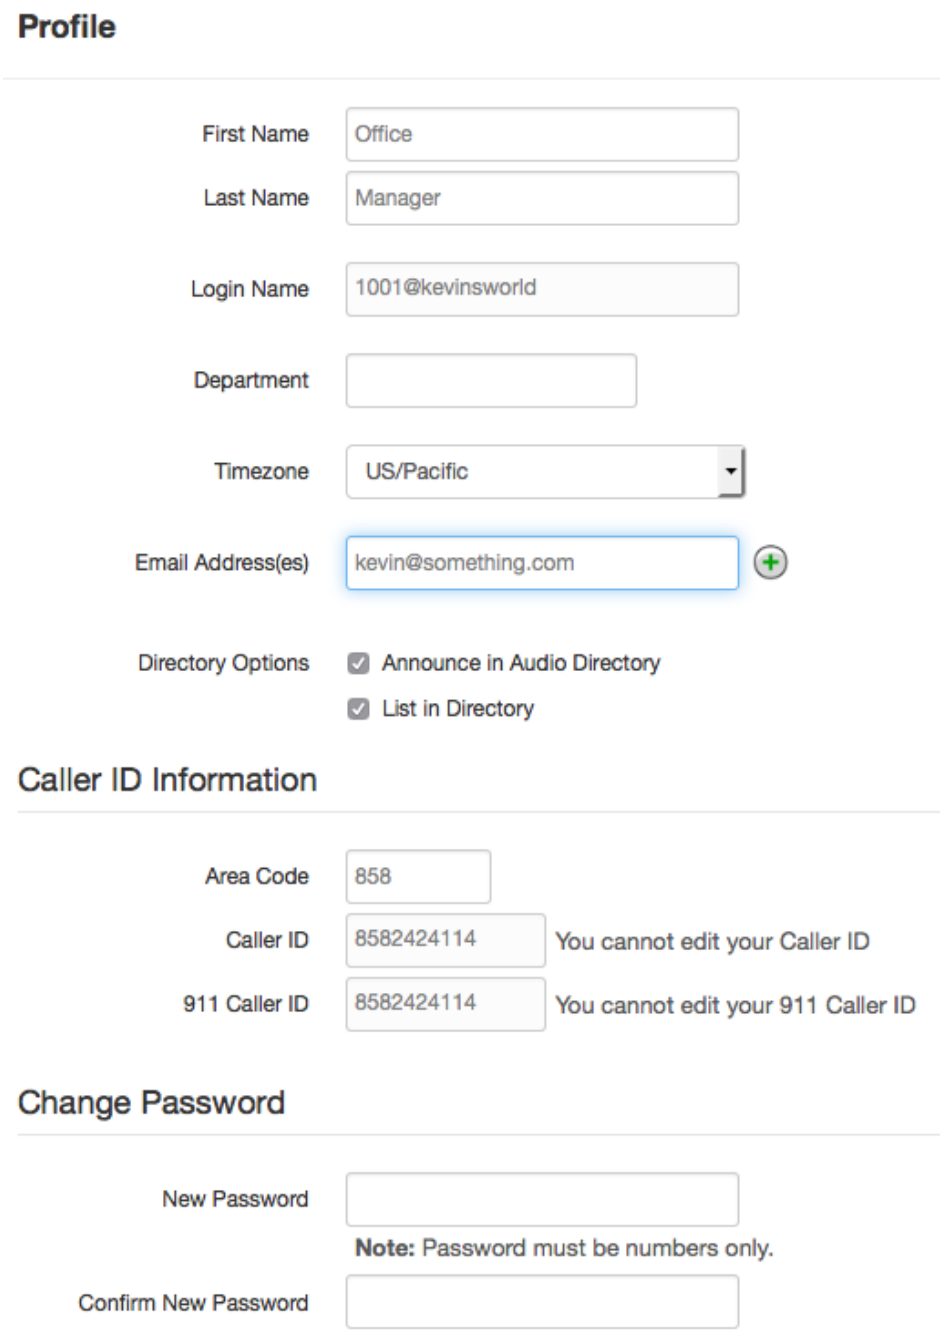

## Table 2-7. Fields in the Profile Page

| Field | Description |
|---|---|
| First Name | The first name and last name will be shown in contacts and used in the dial by name directory. |
| Last Name | |
| Time Zone | Your local time Zone. |
| Email Address(es) | Address used for email, password resets, etc. To add email addresses, click the  button to add fields for entering more email addresses. |
| Record User's Calls | Select whether the calls for this user will be recorded (Yes) or not recorded (No). |
| Directory Options | Enables or disables announce in auto directory and list in directory features.<br>• Announce in Audio directory = check to include the user in the dial-by-name directory.<br>• List in Directory = check to add user to the internal extensions list (contacts). |
| Caller ID Information | |
| Area Code | Local area code for 7 digit dialing associated with the user. |
| Caller ID | For outbound calls, this is the number that recipients will see. |
| 911 Caller ID | For calls to 911, this is the e911-enabled number the 911 agent will see. |
| Change Password | |
| New Password | Password for voicemail and the portal. Avoid using common codes like 0000 or 1234. For security, each typed password character is masked by a dot (●).<br>Please keep this number secure. We will never call you to request your passcode. |
| Confirm New Password | |

# INDEX


## 3

3-way conference, 11

## A

Accessing
- portal, 14
- voicemail, 7
- voicemail remotely, 8

Active calls, 15
Allowing callers, 33
Alternate greetings, 8
Answering rules, 30
Attended transfers, 10

## B

Blind transfers, 10
Blocking callers, 33

## C

Call forward, 32
Call handling, 10
Call history, 44
Callers, allowing or blocking, 33
Calls
- active, 15
- incoming, 14
- making, 6
- receiving, 7

Contacts, 36

## D

Dialing
- extension, 6
- off-hook, 6
- on-hook, 6

Directed call pickup, 11

## E

Extension dialing, 6
External number transfers, 11

## G

Greeting
- recording, 19
- uploading, 21

## H

Handling calls, 10
Home page, 16

## I

Incoming calls, 14
Intercom, 6
International calls, 6
Introductory greeting, 43

## M

Mailbox setup, 8
Making international calls, 6
Messages page, 17
Music on hold, 41

## O

Off-hook dialing, 6
On-hook dialing, 6

## P

Park and hold, 11
Phones page, 39
Portal, 14
  call history, 44
  contacts, 36
  home page, 16
  Messages page, 17
  music on hold, 41
  profile, 48
Profile, 48

## R

Receiving calls, 7
Recording a greeting, 19
Remote voicemail, 8
Ring timeout, 33

## S

Setting up your mailbox, 8
Voradian MobileUC, 40

## T

Time frames, 22
Transfers
  attended, 10
  blind, 10
  external numbers, 11
  voicemail, 11

## U

Uploading a greeting, 21

## V

Voicemail, 17
  accessed, 7
  accessed remotely, 8
  settings, 18
  transfer, 11
  tree, 8

VORADIAN™ has made a good faith effort to ensure the accuracy of the information in this document and disclaims any and all implied warranties of merchantability and fitness for a particular use or purpose and makes no express or implied warranties, except as may be stated in its written agreement with and for its customers.

VORADIAN™ shall not be held liable for and or to anyone for any direct, indirect, special or consequential damages due to or in connection with omissions or errors. The information and specifications contained in this document may be subject to change without notice.




**470.729.7200 | 1.833.867.2342**

**WWW.VORADIAN.COM**



Copyright © 2017 VORADIAN, INC. All Rights Reserved. All trademarks and servicemarks are the property of their respective owners